


*Commercial Industrial Regulators*

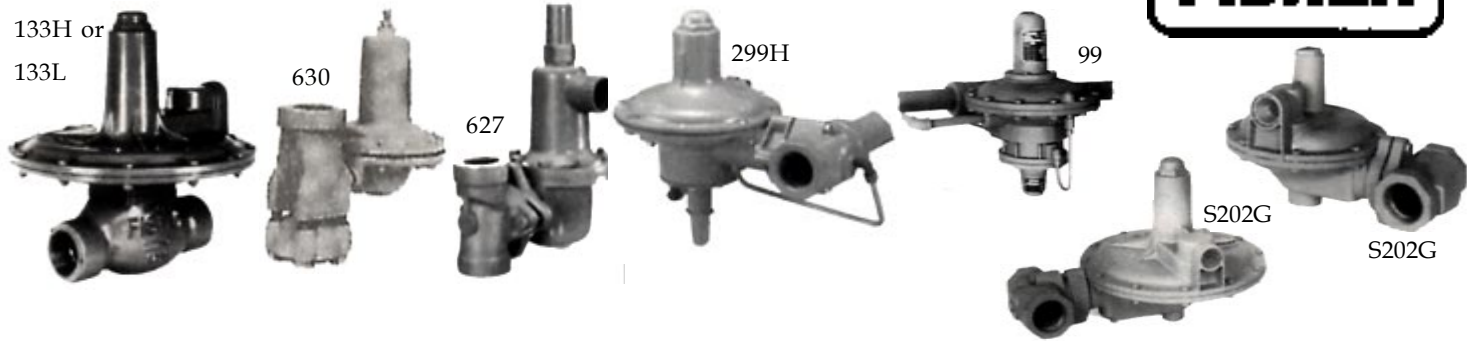

**Type 99-** The 99 can be used for lower high pressure. A downstream control line is required.  
**Type 133 -** Second-Stage regulator low pressure or pounds service. Maximum inlet pressure 60 psig  
**Type 627 & 630 -** Large capacity high pressure regulators for

use in conjunction with Type S302G or S202G units.  
**Type S202G & S302G -** Large capacity low pressure regulators for commercial/industrial applications.  
**Type 299H-** A high capacity regulator which uses the same operating principles as the Type 99.

Type #	Capacity BTU/HR Propane	Orifice Size	Inlet & Outlet Connection	Outlet Pressure Range	Outlet Pressure Setting	List	
627-5810	6,080,000	3/8"	3/4" FPT	5-20psig	10 psig	\$375.95	
627-6210	10,755,000	1/2"	1" FPT				
627-7710	10,733,000						
630-104/78	14,000,000	7/8"	2" FPT	8-20 psig	1/2 psig	\$1,066.89	
99-510P	29,295,000			1/4-2 psig		\$2,844.05	
99-513P	36,225,000			2-10 psig		10 psig	
S102KL-BFC	2,000,000	3/8"	3/4" FPT	8"-15" WC	11" WC	\$161.65	
S102KL-DCF			3/4" X 1" FPT				
S102KL-CFC			1" FPT				
S102KL-FFC			1 1/4" FPT				
S102KL-KFC			1 1/2" FPT				
299H-101	13,100,000	3/4"	2" FPT	9"-20" WC	10 psig	\$1,138.02	
299H-102	19,700,000		1 1/2" FPT				
299H-103	23,300,000		2" FPT	6-16psig			10 psig
299H-104	38,000,000		1 1/2" FPT	9"-20" WC			11" WC
299H-105	20,400,000		2" FPT				
299H-106			38,000,000	1 1/2" FNPT			6-16 psig
299H-107	38,000,000		2" FPT				
299H-108				1 1/4" FPT			6"-14" WC
S302G-FMC	5,200,000	1 1/2" FPT					
S302G-KMC	5,500,000	2" FPT					
S302G-SMC		10,600,000	1 1/2" FPT	9"-18" WC	14" WC	\$885.23	
S302G-BNC	14,500,000	1"	2" FPT			\$1,016.09	
S302G-CNC	70,875,000			2"	2" FPT	8 1/2"-18 WC	\$1,656.22
133L-4	113,400,000					1 1/2-3psig	3 psig
133H-1							

Capacity based on 20% drop.